
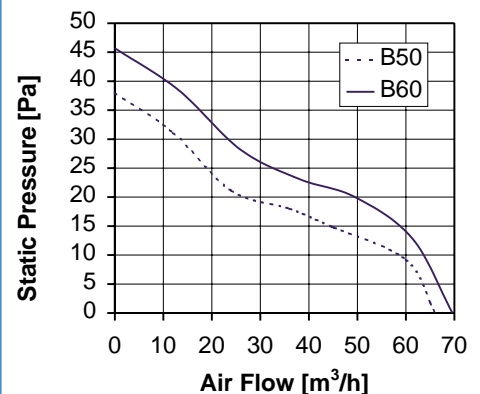
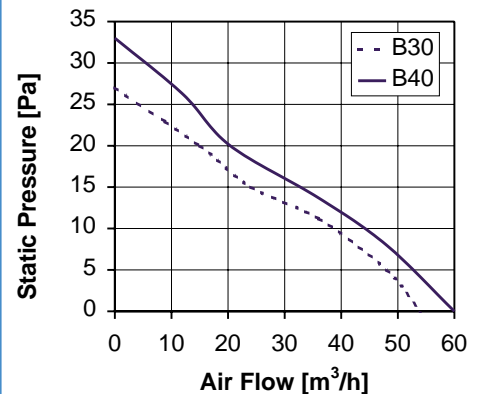


FEATURES

- Size:** 80 x 80 x 25 mm
- Casing:** UL 94V-0 reinforced polybutylene plastic
- Impeller:** UL94V-0 reinforced polybutylene plastic
- Weight:** 93 g.
- Motor type:** Brushless
- Motor protections:** Auto restart, polarity protection
- Bearing system:** Radial shielded ball bearing
- Life-time:** L10 at 40°C 70,000 hours
- Temperature range:** -10°C to +70°
- Connection:** Lead wires AWG24, red/black, UL 1007

Model	Rated Voltage V	Input Voltage Range V	Rated Power W	Rated Current mA	Speed rpm	Noise dB(A)	Max Static Pressure Pa	Max Air Flow m³/h	Approvals			
									UL	CSA	VDE	TUV
3110KL-04W-B10	12	6.0-13.8	1.20	100	2150	22	17.0	42.0	✓	✓		
3110KL-04W-B20	12	6.0-13.8	1.32	110	2400	25	22.0	48.0	✓	✓	✓	
3110KL-04W-B30	12	6.0-13.8	2.04	170	2700	28	27.0	54.0	✓	✓	✓	
3110KL-04W-B40	12	6.0-13.8	2.40	200	3000	31	33.0	60.0	✓	✓		
3110KL-04W-B50	12	6.0-13.8	2.76	230	3250	34	38.0	66.0	✓	✓		
3110KL-04W-B60	12	6.0-13.8	3.12	260	3600	37	45.7	74.8	✓	✓		
3110KL-05W-B10	24	10.0-27.6	1.44	60	2150	22	17.0	42.0	✓	✓	✓	
3110KL-05W-B20	24	10.0-27.6	1.68	70	2400	25	22.0	48.0	✓	✓	✓	
3110KL-05W-B30	24	10.0-27.6	1.92	80	2700	28	27.0	54.0	✓	✓	✓	
3110KL-05W-B40	24	10.0-27.6	2.40	100	3000	31	33.0	60.0	✓	✓	✓	
3110KL-05W-B50	24	10.0-27.6	2.88	120	3250	34	38.0	66.0	✓			
3110KL-05W-B60	24	10.0-27.6	3.36	140	3400	35	45.7	68.0	✓			

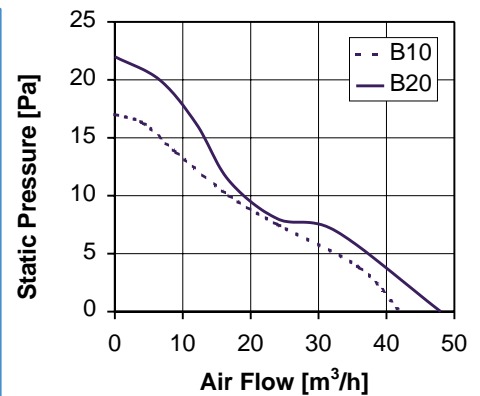

Please refer to our terms of sale including our warranty and limited liabilities clauses.

Approvals

